

Raw Mango Cutting Machine



Capacity 100 Kg/hr to 2000 Kg/hr

This machine is useful for Half cutting of Raw Mangoes, Lemon, Carrot. The structure of machine is built in Mild steel while food contact parts are made up of S.S.304. The machine is equipped with 1HP electrical motor of ISI standard. The output of machine is approximately at 500 kg/hr.

Papaya Cutting Machine



A complete SS 304 machine, mounted on anti vibration mounts, Structure of 3 mm formed sheet and other hoppers of 1.6 mm mat finish sheeting. Useful for FOUR PIECE cutting of Peeled Papayas before the de-seeding. Cutting is by 12" SS 410 cutters. Suitable for all regular sizes of Papayas and cutting collection in the mesh tray. Directly fed to multi purpose grader for de seeding about 90% cleaned papaya pieces. Feeding :Unload in Top tray. Easy to feed by hand.

Capacity 600-700 (Approx.)

Power Req. 2.0 hp,440V, 50Hz two electrical motors of ISI standard.

Chilly Cutting Machine



It is a proven mechanical system most commonly used for de Green Chilly cutting. All food contact parts and structure is made up of 304 Grade Stainless steel .Cut pieces are as per specifications or otherwise 20mm in length. Compact in size & easy for working. Long life SS Cutting blades. Feeding arm takes chilly through cutting blades.

Capacity (Kg/ Hr)	100-150	400-500	900-1000
-------------------	---------	---------	----------

Power Req.	1.0 HP, 415V	2.0 HP, 415V	3.0 HP, 415V
------------	--------------	--------------	--------------

Pulveriser Fruit Mills



A proven mechanical system, all contact parts in S.S.304. It's most commonly used for Crushing of fruits into fine paste/ pieces for further operations. Useful for paste-making of Garlic-pods, hard material with body-fibres or shreads & for wet masala ingredients before mixing. Can be used for course paste, crush, mixes, multi-products crushing, Pre-crush for De-hydration inputs.

MODEL	FM- 1	FM- 2	FM- 3	FM- 4	FM- 5
Capacity (kg/hr)25-40	200-250	400-500		800-1000	1500-2000
Power Req. HP	1.0, 230v	2.0, 230v	2.0, 415v	3.0, 415V	5.0, 415V

Potato Peeler



Built in sprinkler system, Adhesive coated emery peeling system. No need to stop the machine for loading and unloading of Potatos. Hence gets higher production.

MODEL	PL-I	PL-II	PL-III
Capacity (kg/hr)	180-200	600-800	1000-1200
Power Req.	0.5HP,230v	2.0 HP,230v	3.0 HP,230v

Papaya Peeler



Built in sprinkler system, Adhesive coated emery peeling system. No need to stop the machine for loading and unloading of Papayas. Hence gets higher production in less efforts and saving of water.

Feeding : By hand through upper side of the drum.

Collection : At bottom side through door of the drum in running system.

MODEL	PL-I	PL-II	PL-III	PL-IV
Capacity (kg/hr)	250-300	500-600	900-1000	1.5-1.75 T
Power Req.	1.5 HP,230v	3.0 HP	5.0 HP	7.5 HP

Ginger Cleaner



Useful in cleaning of ginger to get dust-free and totally white-skin ginger by tumbling process. ginger is kept inside the rotating drum & is cleaned by means of water spray as well as centrifugal force. Very beneficial because minimum yield wastage compared with production quantity.

Capacity (kg/hr) 75-90


200-240

power req.

1. 0 hp, 415v.

3. 0 hp, 415v.


Garlic Cleaner

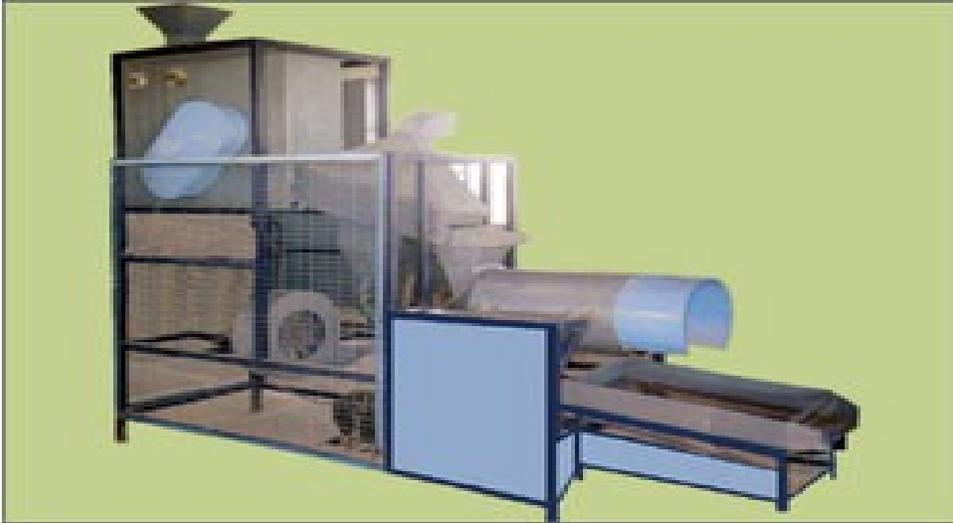

Useful for depotting and hard skin cleaning of garlic. M. S. Fabricated, duly spray-painted with provision of separation of garlic pots, dust, skin and dead pots separately, should be suitable to clean the maximum garlic of different season. (old garlic of 3 months minimum means at least naturally dried at once)

Capacity (kg/hr)	30-40	60	100
Power req.	3 hp, 415v	3 hp, 415v	1 hp, 415v

Flat Type Papad Mixer

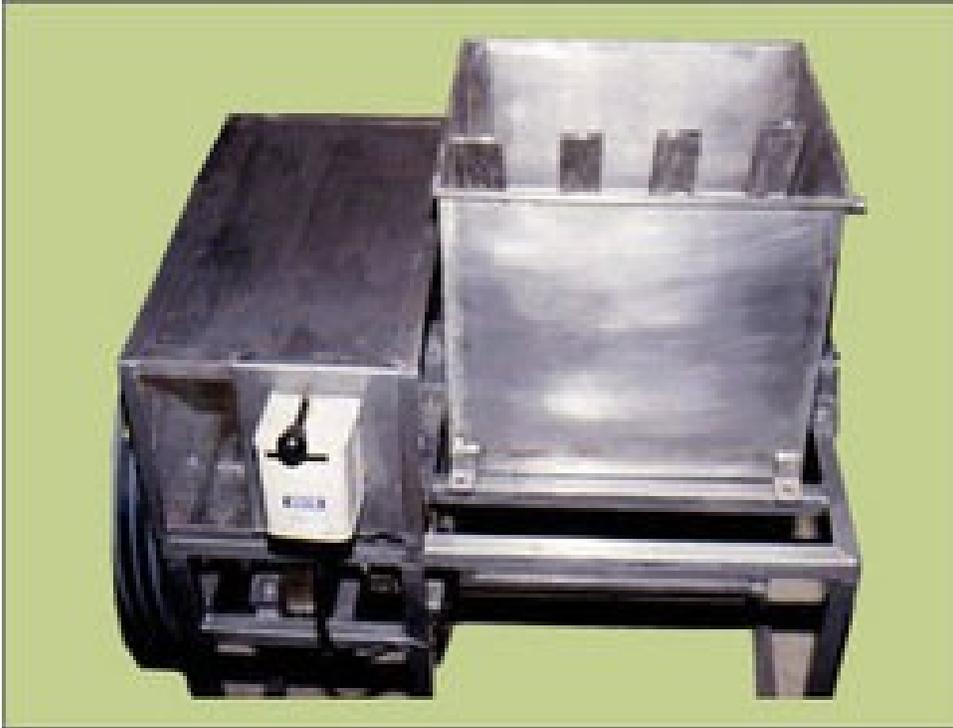

All food contact parts are made up of Stainless Steel with non stretching Rollers. Very useful the domestic production purpose. Foot operated machines gives you better out put and less manpower losses with minimum efforts. Pod of Dough is kept in two HDPE thick sheets and rolling is achieved.

Capacity (Kg/Batch)	10-12	40 - 55
Power Req.	2.0Hp, 415V	5 Hp, 415 V.


Gum Mixer



Tank made up of 2 mm. Stainless-Steel to withstand with the normal driving of Stirrer motor
Mounted on M.S. fabricated structure. Available in Cylindrical shape only.

Capacity	25 Lit	50 Lit.
Power Req.	0.25 Hp	0. Hp

Slicers

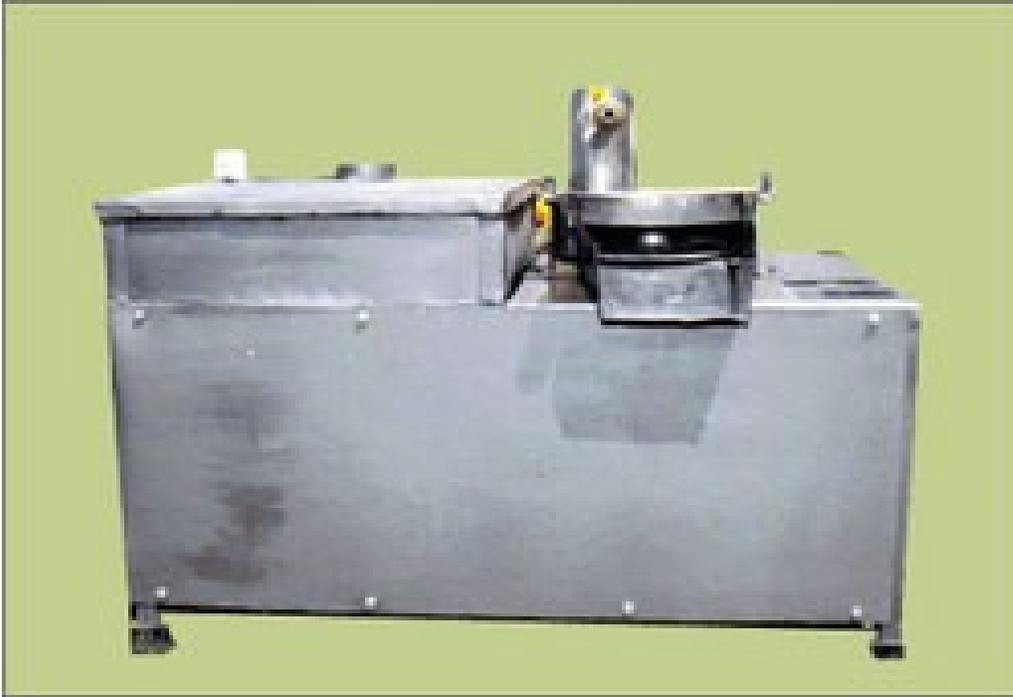

MODEL	SL-1P	SL-II P	SL-III P	CFS- 1	CFS-2
Capacity (kg/hr)	25-40	75-100	400-500	1000-1200	2000-2200
Power Req / HP	1.5	2.00	3.00	5.00	7.5

Dicer & Slicer (for tuty fruity, carrot, orange pills)



Model	sl-it	sl-iit	sl-iiit
Capacity (kg/hr)	750-900	1200-1500	2000-2200
Power Req.	2.0 hp ,415v	5.0 hp, 415v	7.5 hp, 415v

Fruit Washers



Capacity from 50 Kg per hour to 2 ton per hours

Useful for cleaning of Raw mangoes, Lemon , Carrot ,tomato having thick skin,Clearing is done under air pressure bubbles created in bulk volume of water. One side inlet will accept the material and cleaned part of the material will be carried out by means of 'Derlium' conveyor belt at the output end sterilization is preformed by means of spray chamber. Out put can be collected at mesh tables or on cutting belt directly..

MODEL	BT-250	F-700	F-1700
Capacity (kg/hr)	200-250	700-750	1500-1750
Power	2.0Hp, 230V	3.5 Hp, 415V	5.5Hp, 415V